


# Access Compliance Report Public Rights-of-Way (Transit Stops)

|                                         |                         |                                         |             |
|-----------------------------------------|-------------------------|-----------------------------------------|-------------|
| Intersection ID: 10039999               | Main Street: TRINITY_RD | Cross Street: N/A                       | Location: N |
| ADA ID: C0E8193DE5A9                    | Overall Compliance: No  | Severity Score: 50                      |             |
| Codes/Mitigation Info/Possible Solution |                         | Field Measurements/Component Compliance |             |

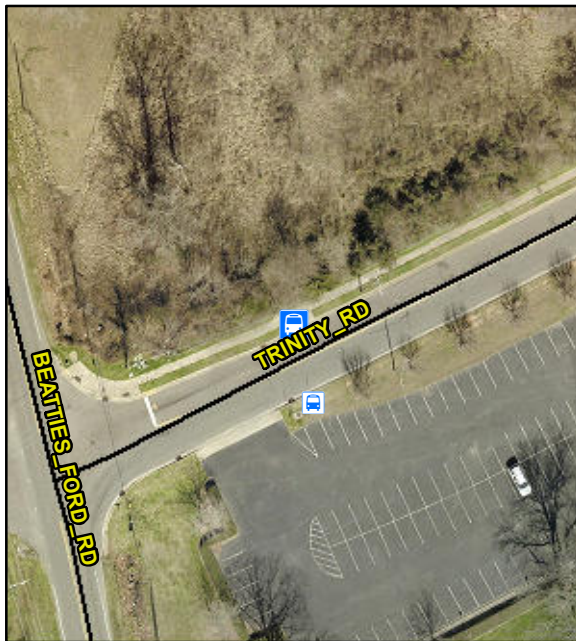

Possible Solutions:

**Remove & Replace Boarding Area.  
Remove & Replace Sidewalk To  
Boarding Area. Remove or Relocate  
Protruding Objects/Obstructions.**

Surveyor Notes:

**N/A**

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.5,  
R302.6, R308.1.1.2**

| Compliance | Description                     | Data  |
|------------|---------------------------------|-------|
| Yes        | Boarding Area                   | Yes   |
| Yes        | Boarding Area Width (in)        | 109.0 |
| Yes        | Boarding Area Length (in)       | 132.0 |
| No         | Boarding Area Slope %           | 4.9   |
| Yes        | Boarding Area XSlope %          | 2.9   |
| No         | PAR 1 Exist?                    | Yes   |
| Yes        | PAR 1 Width (in)                | 60.0  |
| Yes        | PAR 1 Slope %                   | 3.3   |
| No         | PAR 1 XSlope %                  | 2.6   |
| N/A        | PAR 1 XSlope Location           | Perp  |
| No         | PAR 2 Exist?                    | Yes   |
| Yes        | PAR 2 Width (in)                | 60.0  |
| No         | PAR 2 Slope %                   | 3.6   |
| No         | PAR 2 XSlope %                  | 3.3   |
| N/A        | PAR 2 XSlope Location           | Perp  |
| Yes        | Boarding Area Connected to PAR? | Yes   |
| N/A        | Road Slope %                    | 3.3   |
| N/A        | Shelter                         | No    |
| N/A        | Clear Floor Space               | No    |
| N/A        | Clear Floor Space Shelter       | No    |
| N/A        | Clear Floor Space Width (in)    | N/A   |
| N/A        | Clear Floor Space Length (in)   | N/A   |
| N/A        | Clear Floor Space Slope %       | N/A   |
| N/A        | Clear Floor Space XSlope %      | N/A   |
| N/A        | Alcove Condition?               | No    |
| Yes        | Transit Sign?                   | Yes   |
| Yes        | Transit Sign Height (in)        | 87.0  |
| N/A        | Bench?                          | No    |
| No         | Protruding Objects?             | Yes   |

CATS Stop ID: 42505

CATS Stop Description: Trinity Rd & Beatties Ford Rd

CATS Route ID: 7

CATS Route Name: Beatties Ford

Total Cost: \$ 4150.00

