


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: -9999	Main Street: TRADE ST	Cross Street: N/A	Location: E
ADA ID: CA4CF3C52A8F	Overall Compliance: No	Severity Score: 45	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

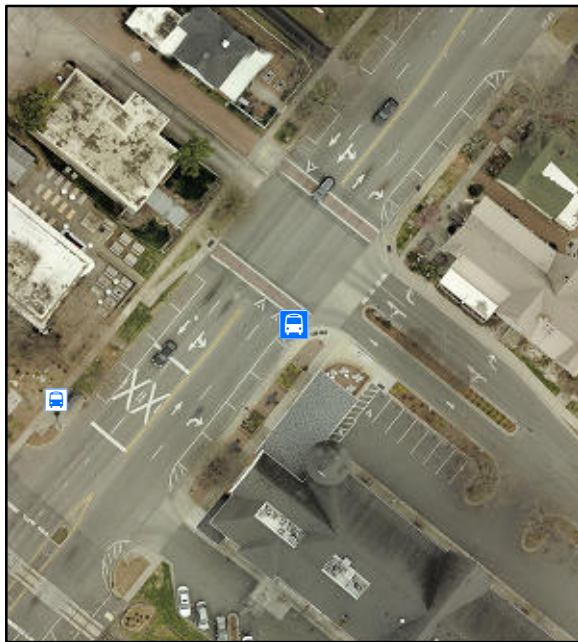

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Provide Clear Floor
Space. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, 810.3, R302,
R302.5, R302.6, R308.1.1.2, R404.1**

CATS Stop ID: **37170**

CATS Stop Description: **Trade St & Matthews Station St**

CATS Route ID: **27, 51, 65x**

CATS Route Name: **Multiple**

Total Cost: \$ **4600.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	5.0
Yes	Boarding Area XSlope %	1.4
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	81.0
Yes	PAR 1 Slope %	1.9
No	PAR 1 XSlope %	8.0
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	81.0
Yes	PAR 2 Slope %	1.8
No	PAR 2 XSlope %	7.8
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.4
N/A	Shelter	No
No	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	96.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

