


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 13718	Main Street: E_7TH_ST	Cross Street: PARK_DR	Location: NW
ADA ID: ECD153FEDB3A	Overall Compliance: No	Severity Score: 20	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

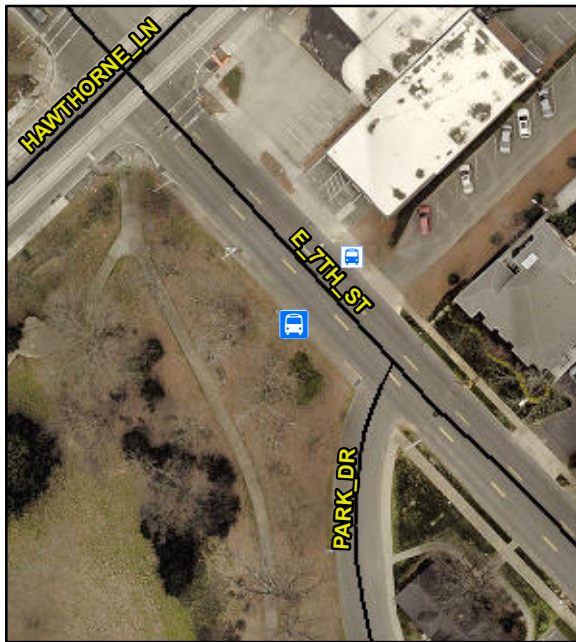

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space.**

Surveyor Notes:

BUS STOP WAS RELOCATED

PROW/ADA:

**305.2, 402.2, 810.2.3, 810.2.4, 810.3,
R302, R302.6, R308.1.1.2, R404.1,
R404.2**

CATS Stop ID: 07980

CATS Stop Description: 7th St & Hawthorne Ln

CATS Route ID: 27

CATS Route Name: Monroe Road

Total Cost: \$ 1950.00

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
Yes	Boarding Area Slope %	0.3
No	Boarding Area XSlope %	3.7
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	73.0
No	PAR 1 Slope %	3.2
Yes	PAR 1 XSlope %	0.6
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	73.0
Yes	PAR 2 Slope %	1.9
Yes	PAR 2 XSlope %	0.9
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.0
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	92.0
Yes	Clear Floor Space Length (in)	60.0
Yes	Clear Floor Space Slope %	0.1
No	Clear Floor Space XSlope %	2.1
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

