


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10033131	Main Street: NORTHLAKE_MALL_DR	Cross Street: N/A	Location: SW
ADA ID: F3D9BCFC5F36	Overall Compliance: No	Severity Score: 10	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

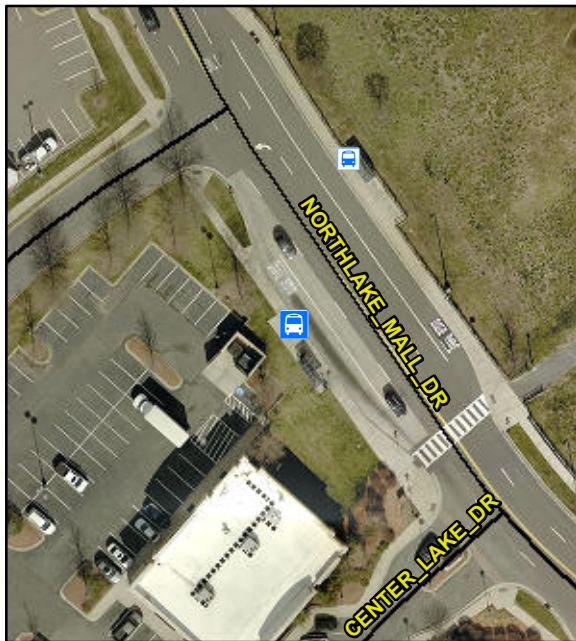

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.5,
R302.6, R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	63.0
Yes	Boarding Area Length (in)	144.0
No	Boarding Area Slope %	3.1
No	Boarding Area XSlope %	2.8
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	72.0
Yes	PAR 1 Slope %	2.0
No	PAR 1 XSlope %	2.6
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	72.0
Yes	PAR 2 Slope %	2.0
No	PAR 2 XSlope %	3.3
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.6
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	68.0
Yes	Clear Floor Space Length (in)	64.0
Yes	Clear Floor Space Slope %	2.0
Yes	Clear Floor Space XSlope %	1.5
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	88.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: **45818**

CATS Stop Description: **Northlake Mall (1st stop)**

CATS Route ID: **53x, 7, 99**

CATS Route Name: **Multiple**

Total Cost: \$ **4150.00**

