


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10041764	Main Street: WILKINSON_BV	Cross Street: N/A	Location: N
ADA ID: F9AA6D493FCA	Overall Compliance: No	Severity Score: 5	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

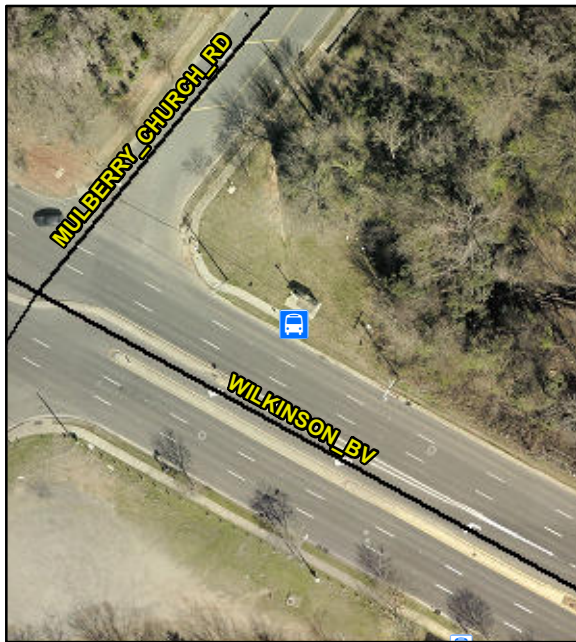

Possible Solutions:

Remove & Replace Sidewalk To Boarding Area. Remove or Relocate Protruding Objects/Obstructions.

Surveyor Notes:

N/A

PROW/ADA:

402.2, 810.2.3, R302, R302.5

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
Yes	Boarding Area Slope %	1.4
Yes	Boarding Area XSlope %	1.3
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.6
No	PAR 1 XSlope %	2.8
N/A	PAR 1 XSlope Location	Perp
N/A	PAR 2 Exist?	No
N/A	PAR 2 Width (in)	N/A
N/A	PAR 2 Slope %	N/A
N/A	PAR 2 XSlope %	N/A
N/A	PAR 2 XSlope Location	N/A
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.0
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	56.0
Yes	Clear Floor Space Length (in)	60.0
Yes	Clear Floor Space Slope %	0.1
Yes	Clear Floor Space XSlope %	0.5
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	92.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: **45415**

CATS Stop Description: **Wilkinson Blvd & Mulberry Church Rd**

CATS Route ID: **5**

CATS Route Name: **Sprinter**

Total Cost: \$ **2700.00**

